

Accessories

Model FV-100 Foot Valve

For quick control of air when cleaning tubes. Has “LOCK ON-EASY OFF” feature. Easily secured to working platform or most convenient location.

Model Number	Order Number	Length		Width		Height		NPT	Weight	
		in.	mm	in.	mm	in.	mm	in.	Lbs.	kg
FV-100	4035310	10	254	6.5	165.1	4	101.6	1	12	5.45



In-Line Lubricator

Lubricator stays connected to the tool. Internal adjustment of lubrication rate.



Ordering Number	Hose Size	Lubricator	Bowl Capacity
3067800	1/2 NPT	#0	1/6 pt (7 cl)
3067900	3/4 NPT	#1	1/3 pt (15 cl)
3068000	3/4 NPT	#2	1/2 pt (23 cl)
3068100	1 NPT	#3	1 pt (47 cl)

HV-TWIN-PAK

Air Distribution Manifold

The HiVis Twin-PAK is an air delivery system that allows two operators to run tools simultaneously from one air supply. The portable design delivers clean and lubricated air in the most confined spaces. The built in S7F filter is unique because it removes 100% of visible moisture from your air supply and automatically purges water before tool operation is affected. The internal oiler has an 11oz capacity to make this unit virtually maintenance free. An overflow safety valve will shut air off to both tools in the event of a hose breaking or being severed. The Twin-PAK is also convenient to stack to make storage easy.



Height 15"
 Length 28-1/2"
 Depth 10"
 Weight 31 lbs

HiVis Manifolds

Eliminate the clutter and run just one hose to your worksite and then connect up to four or eight pneumatic tools at once. Equipped with a gauge to monitor working pressure and a 200 psi pressure release valve to prevent excess pressure build up. Top and bottom brackets allow for easy stacking or mounting to skids or other surfaces. Connect or stack multiple manifolds to handle the busiest worksites.



Model	Number of 3/4" Outlets	Capacity	Working Pressure	Test Pressure	Inlet Size	Tank Diameter	Width with Fittings	Height	Length	Weight
HV-5G-4P	4	5 gal	200 psi	300 psi	1"	10"	22-1/2"	14-1/2"	20"	36 lbs
HV-15G-8P	8	15 gal	200 psi	300 psi	2"	12"	22-1/2"	16-1/2"	44"	72 lbs

Armored Left Hand Wire Wound Hose

Airetool® armored hoses are the toughest available on the market. Providing the wear resistance and toughness needed to last in the harshest of applications.

- Wire Braided Hydraulic rated hose 1,200 PSI.
- Tightly wound outer “D” shaped wire guard.
- Crimped fixed fitting at work end of hose.
- Crimped swivel fitting at supply end of hose.



Air Hose Selection Guide

Note: Standard “WB-LHWW” braid hose has one layer wire braid and a left hand wire wound outside hose protector.

Hose Size (in.)	Working Pressure PSI	Length ft.		Model Number	Order Number	Air Coupling Pipe Tap Size (in.)	Wire Wound (W/W) Not Wire Wound (N/W/W)	Hose OD (over wire)		
		ft.	M					in.	mm	
Air Motor – 25										
3/16	250	25	7.62	3/16" -25 ft.-250	4105071	18-20	N/W/W	0.437	11.11	
3/16	250	50	15.24	3/16" -50 ft.-250	4105072	18-20	N/W/W	0.437	11.11	
Air Motors – 27, 27A, 30, 30A										
1/4	225	25	7.62	1/4" -25 ft.-225	4105075	1/8	N/W/W	0.531	13.49	
1/4	225	50	15.24	1/4" -50 ft.-225	4105076	1/8	N/W/W	0.531	13.49	
Air Motors – X-64, X-61										
1/4	225	25	7.62	1/4" -25 ft.-225	4105073	1/4	N/W/W	0.531	13.49	
1/4	225	50	15.24	1/4" -50 ft.-225	4105074	1/4	N/W/W	0.531	13.49	
Air Motor – 29										
3/8	205	25	7.62	3/8" -25 ft.-205	4105083	1/4	N/W/W	0.687	17.46	
3/8	205	50	15.24	3/8" -50 ft.-205	4105084	1/4	N/W/W	0.687	17.46	
Air Motors – 26, 31										
3/8	205	25	7.62	3/8" -25 ft.	4105088	3/8	N/W/W	0.687	17.46	
3/8	205	50	15.24	3/8" -50 ft.	4105089	3/8	N/W/W	0.687	17.46	
Air Motors – X-63, X-63A, X-65, X-65A, X-66										
3/8	625	25	7.62	3/8" -25 ft.-WB-LHWW	1717371	3/8	Left hand W/W	0.875	22.22	
3/8	625	50	15.24	3/8" -50 ft.-WB-LHWW	1717372	3/8	Left hand W/W	0.875	22.22	
Air Motors – 3150, 3175, 4200, 4225, 4250										
1/2	625	25	7.62	1/2" -25 ft.-WB-LHWW	1717373	1/2	Left hand W/W	1.000	25.4	
1/2	625	50	15.24	1/2" -50 ft.-WB-LHWW	1717374	1/2	Left hand W/W	1.000	25.4	
Air Motors – 3162, 3187, 3200, 3225, 3212, 4300, 4325										
3/4	625	25	7.62	3/4" -25 ft.-WB-LHWW	1717375	3/4	Left hand W/W	1.250	31.75	
3/4	625	50	15.24	3/4" -50 ft.-WB-LHWW	1717376	3/4	Left hand W/W	1.250	31.75	
All other air motors										
1	625	25	7.62	1" -25 ft.-WB-LHWW	1717377	1	Left hand W/W	1.625	41.28	
1	625	50	15.24	1" -50 ft.-WB-LHWW	1717378	1	Left hand W/W	1.625	41.28	

Swivel Connections

Extreme Service Duty designed for 3500 and larger cleaning motors available in 1" & 1-1/4" NPT pipe thread.

Ordering Number	Description	Thread Size
4091300	SC 100 Swivel	1" NPT
4091400	SC 125 Swivel	1-1/4" NPT




Ergonomic Tool Balancers

Capacity: 1 - 45 lbs (0.5 - 20.5 kg)


- External tension adjustment.
- 360° Swivel.
- Retracting in-line cable.



BL-6A

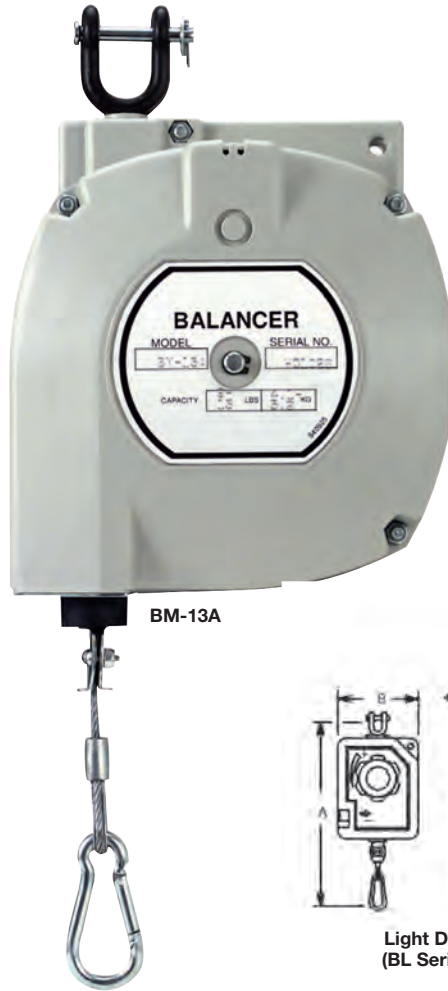

BM-13A

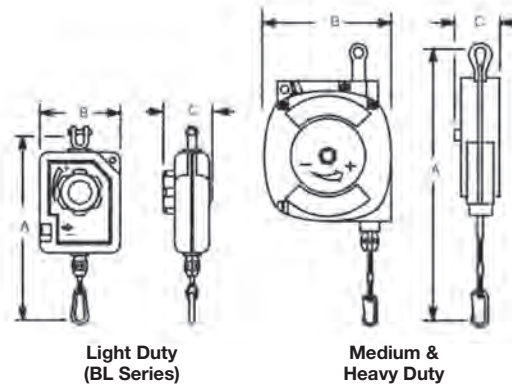

Light Duty
(BL Series)

Medium &
Heavy Duty

Model Number	Lock Feature	Capacity		"A"		"B"		"C"		Weight	
		lbs.	kg	in.	mm	in.	mm	in.	mm	lbs.	kg

Light Duty – 5.2 ft. (1.6m) Cable Travel

BL-2A	–	2.0-1.0	0.9-0.5	10.4	263	4.0	102	2.2	56	1.1	0.5
BL-4A	–	4.0-2.0	1.8-0.9	10.4	263	4.0	102	2.2	56	1.1	0.5

Light Duty – 6.7 ft. (2.0m) Cable Travel

BL-6A	–	6.0-4.0	2.7-1.8	12.9	327	5.5	140	3.1	79	3.3	1.5
BLL-6A	Ratchet	6.0-4.0	2.7-1.8	12.9	327	5.5	140	3.1	79	3.3	1.5
BL-8A	–	8.0-6.0	3.6-2.7	12.9	327	5.5	140	3.1	79	3.3	1.5
BLL-8A	Ratchet	8.0-6.0	3.6-2.7	12.9	327	5.5	140	3.1	79	3.3	1.5

Medium Duty – 6.6ft. (2.0m) Cable Travel

BM-13A	Non-Locking	13-9.0	5.9-4.1	13.8	350	6.9	175	4.5	114	9.0	4.1
BM-13A	Lock/Release	13-9.0	5.9-4.1	13.8	350	6.9	175	4.5	114	9.0	4.1
BM-18A	Non-Locking	18-13	8.2-5.9	13.8	350	6.9	175	4.5	114	9.0	4.1

Medium Duty – 6.0ft. (1.8m) Cable Travel

BM-25A	Automatic	25-18	11.4-8.2	20.7	527	7.8	197	6.6	169	19.0	8.6
BM-35A	Automatic	35-25	15.9-11.4	20.7	527	7.8	197	6.6	169	19.0	8.6
BM-45A	Automatic	45-35	20.5-15.9	20.7	527	7.8	197	6.6	169	19.0	8.6