


📌 Holders for regular MiniMill/HyperMill cutter heads

OUTSIDE BEVELING HOLDERS

Standard: 37,5°; other angles only on request

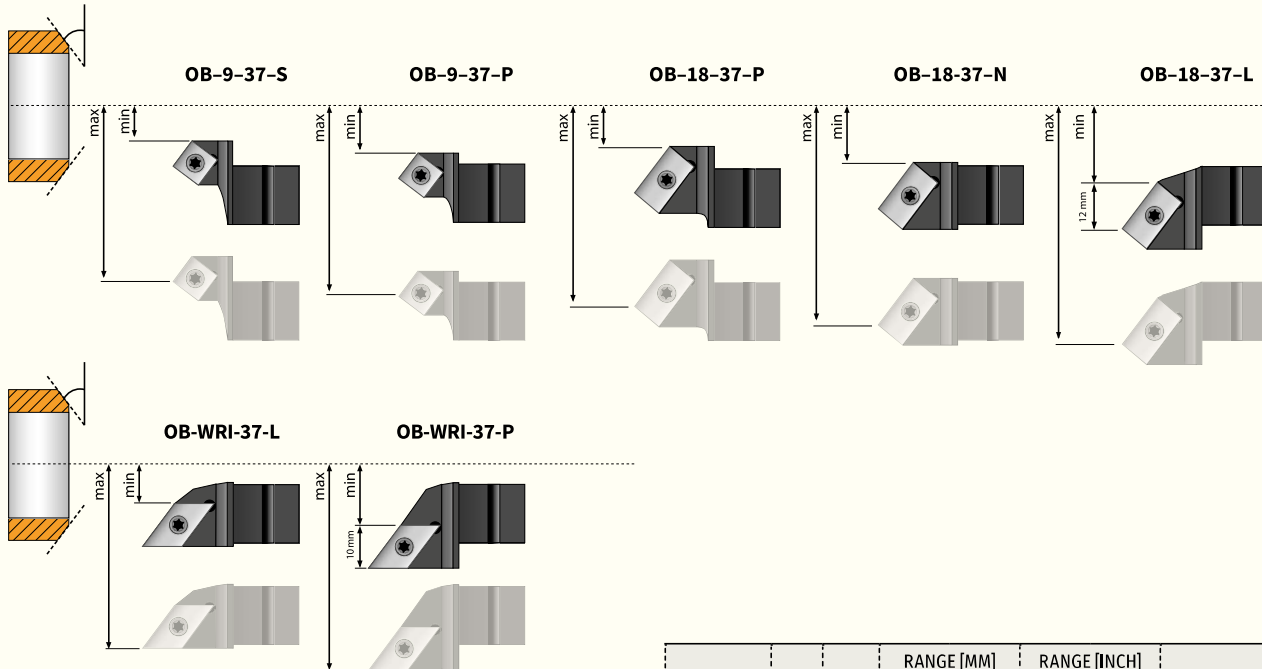

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
OB-9-37-S	CS	60	16,00	26,00	0,630	1,024	20; 30; 37,5 ; 45
		88	16,00	51,00	0,630	2,008	20; 30; 37,5 ; 45
OB-9-37-P	CS	60	24,00	34,00	0,945	1,339	20; 30; 37,5 ; 45
		88	24,00	58,00	0,945	2,283	20; 30; 37,5 ; 45
OB-18-37-P	CDI	106	28,00	72,00	1,102	2,835	20; 30; 37,5 ; 45
		60	24,00	47,00	0,945	1,850	20; 30; 37,5 ; 45
		88	24,00	71,00	0,945	2,795	20; 30; 37,5 ; 45
		106	28,00	85,00	1,102	3,346	20; 30; 37,5 ; 45
		114	31,00	88,00	1,220	3,465	20; 30; 37,5 ; 45
OB-18-37-L	CDI	135	31,00	109,00	1,220	4,291	20; 30; 37,5 ; 45
		175	31,00	149,00	1,220	5,866	20; 30; 37,5 ; 45

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
OB-18-37-N	CDI	60	34,00	56,00	1,339	2,205	20; 30; 37,5 ; 45
		88	34,00	80,00	1,339	3,150	20; 30; 37,5 ; 45
		106	38,00	94,00	1,496	3,701	20; 30; 37,5 ; 45
		114	43,00	101,00	1,693	3,976	20; 30; 37,5 ; 45
		135	43,00	122,00	1,693	4,803	20; 30; 37,5 ; 45
OB-18-37-L	CDI	175	43,00	162,00	1,693	6,378	20; 30; 37,5 ; 45
		60	40,00	63,00	1,575	2,480	20; 30; 37,5 ; 45
		88	40,00	87,00	1,575	3,425	20; 30; 37,5 ; 45
		106	44,00	101,00	1,732	3,976	20; 30; 37,5 ; 45
		114	47,00	104,00	1,850	4,094	20; 30; 37,5 ; 45
OB-18-37-L	CDI	135	47,00	125,00	1,850	4,921	20; 30; 37,5 ; 45
		175	47,00	165,00	1,850	6,496	20; 30; 37,5 ; 45
		OB-WRI-37-L	WRIL	64	22,00	66,00	0,866
OB-WRI-37-P	WRIL	64	36,00	80,00	1,417	3,150	30; 37,5
		99	36,00	116,00	1,417	4,567	30; 37,5