



**INSIDE BEVELING HOLDERS**

Standard: 37,5°; other angles only on request

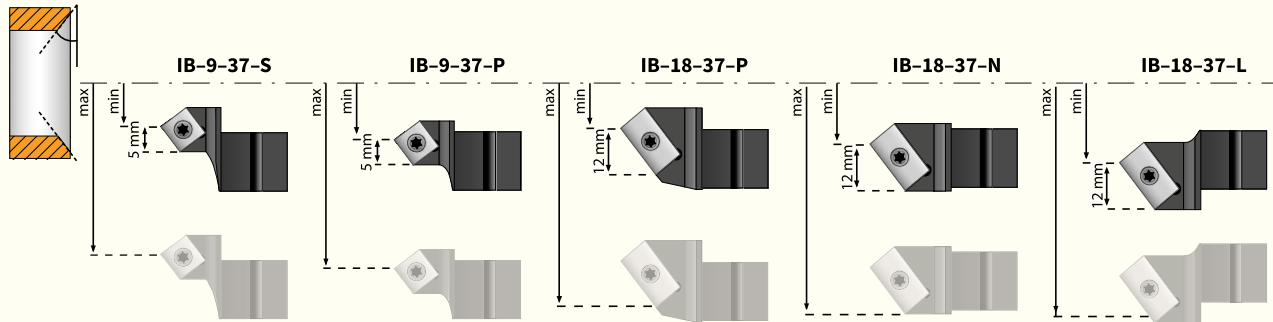

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
IB-9-37-S	CS	60	29,00	39,00	1,142	1,535	20; 30; <b>37,5</b> ; 45
		88	29,00	63,00	1,142	2,480	20; 30; <b>37,5</b> ; 45
		106	33,00	77,00	1,299	3,031	20; 30; <b>37,5</b> ; 45
IB-9-37-P	CS	60	35,50	45,50	1,398	1,791	20; 30; <b>37,5</b> ; 45
		88	35,50	70,00	1,398	2,756	20; 30; <b>37,5</b> ; 45
		106	39,50	84,00	1,555	3,307	20; 30; <b>37,5</b> ; 45
IB-18-37-P	CDI	60	35,50	58,00	1,398	2,283	20; 30; <b>37,5</b> ; 45
		88	35,50	82,50	1,398	3,248	20; 30; <b>37,5</b> ; 45
		106	39,50	96,50	1,555	3,799	20; 30; <b>37,5</b> ; 45
		114	42,00	102,00	1,654	4,016	20; 30; <b>37,5</b> ; 45
		135	42,00	123,00	1,654	4,843	20; 30; <b>37,5</b> ; 45
175	42,00	163,00	1,654	6,417	20; 30; <b>37,5</b> ; 45		

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
IB-18-37-N	CDI	60	44,50	67,50	1,752	2,657	20; 30; <b>37,5</b> ; 45
		88	44,50	92,00	1,752	3,622	20; 30; <b>37,5</b> ; 45
		106	48,50	106,00	1,909	4,173	20; 30; <b>37,5</b> ; 45
		114	51,00	111,00	2,008	4,370	20; 30; <b>37,5</b> ; 45
		135	51,00	132,00	2,008	5,197	20; 30; <b>37,5</b> ; 45
175	51,00	172,00	2,008	6,772	20; 30; <b>37,5</b> ; 45		
IB-18-37-L	CDI	60	53,00	76,00	2,087	2,992	20; 30; <b>37,5</b> ; 45
		88	53,00	100,00	2,087	3,937	20; 30; <b>37,5</b> ; 45
		106	57,00	114,00	2,244	4,488	20; 30; <b>37,5</b> ; 45
		114	60,00	120,00	2,362	4,724	20; 30; <b>37,5</b> ; 45
		135	60,00	141,00	2,362	5,551	20; 30; <b>37,5</b> ; 45
175	60,00	181,00	2,362	7,126	20; 30; <b>37,5</b> ; 45		

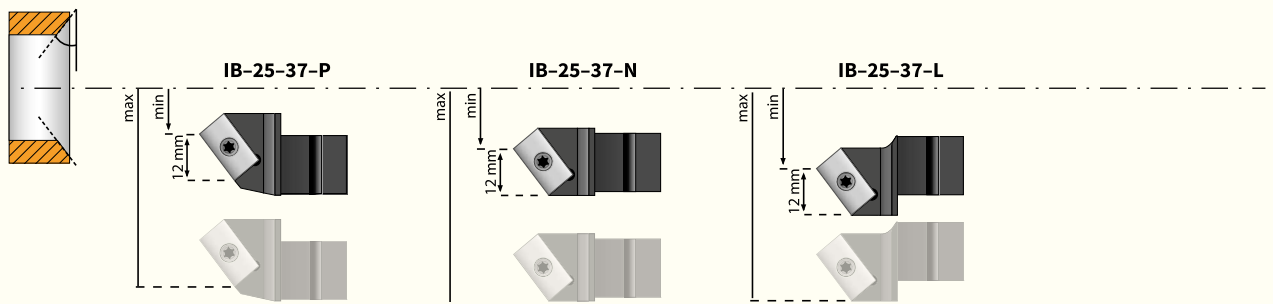

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
IB-25-37-P	CDK	60	35,50	63,00	1,398	2,480	20; 30; <b>37,5</b> ; 45
		88	35,50	87,50	1,398	3,444	20; 30; <b>37,5</b> ; 45
		106	39,50	101,50	1,555	3,996	20; 30; <b>37,5</b> ; 45
		114	42,00	107,00	1,654	4,212	20; 30; <b>37,5</b> ; 45
		135	42,00	128,00	1,654	5,039	20; 30; <b>37,5</b> ; 45
		175	42,00	168,00	1,654	6,614	20; 30; <b>37,5</b> ; 45
IB-25-37-N	CDK	60	44,50	72,50	1,752	2,854	20; 30; <b>37,5</b> ; 45
		88	44,50	97,00	1,752	3,818	20; 30; <b>37,5</b> ; 45
		106	48,50	111,00	1,909	4,370	20; 30; <b>37,5</b> ; 45
		114	51,00	116,00	2,008	4,566	20; 30; <b>37,5</b> ; 45
		135	51,00	137,00	2,008	5,393	20; 30; <b>37,5</b> ; 45
		175	51,00	177,00	2,008	6,969	20; 30; <b>37,5</b> ; 45

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
IB-25-37-L	CDK	60	53,00	81,00	2,087	3,188	20; 30; <b>37,5</b> ; 45
		88	53,00	105,00	2,087	4,133	20; 30; <b>37,5</b> ; 45
		106	57,00	119,00	2,244	4,685	20; 30; <b>37,5</b> ; 45
		114	60,00	125,00	2,362	4,921	20; 30; <b>37,5</b> ; 45
		135	60,00	146,00	2,362	5,748	20; 30; <b>37,5</b> ; 45
		175	60,00	186,00	2,362	7,322	20; 30; <b>37,5</b> ; 45